

Polias Sincronizadoras

T5

Passo 5 mm (Padronizada)

Dentes Trapezoidais

Para correias de largura 8 mm

Código	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Min.	Ø P Furo Máx.	Ø C Cubo	8			Material
								L1	L2	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	12,5	18,5	3,3	AL
12 T5	12	6F	19,10	23	4	6	12	12,5	18,5	6,5	AL
14 T5	14	6F	22,29	26	6	8	14	12,5	18,5	6,5	AL
15 T5	15	6F	23,88	28	6	9	16	12,5	18,5	7,7	AL
16 T5	16	6F	25,47	30	6	10	16	12,5	18,5	9,0	AL
18 T5	18	6F	28,65	33	6	12	20	12,5	18,5	10,0	AL
19 T5	19	6F	30,25	34	6	14	20	12,5	18,5	11,0	AL
20 T5	20	6F	31,83	36	6	14	20	12,5	18,5	12,0	AL
24 T5	24	6F	38,21	42	6	14	25	12,5	18,5	14,0	AL
25 T5	25	6F	39,80	43	6	16	25	12,5	18,5	14,0	AL
27 T5	27	6F	42,98	47	8	16	30	12,5	18,5	16,0	AL
30 T5	30	6F	47,76	51	8	18	34	12,5	18,5	20,0	AL
32 T5	32	6F	50,94	55	8	18	38	12,5	18,5	26,0	AL
36 T5	36	6F	57,31	61	8	25	40	12,5	18,5	38,0	AL
40 T5	40	6F	63,66	67	8	25	42	12,5	18,5	47,0	AL
48 T5	48	6	76,42	-	8	30	50	13,0	19,0	62,0	AL
60 T5	60	6	95,52	-	10	35	55	13,0	19,0	80,0	AL
72 T5	72	6	114,59	-	10	40	55	13,0	19,0	120,0	AL

Para correias de largura 10 mm
Para correias de largura 12 mm

Código	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Min.	Ø P Furo Máx.	Ø C Cubo	10			12			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	14,5	20,5	7,0	16,5	23,0	7,5	AL
12 T5	12	6F	19,10	23	4	6	12	14,5	20,5	8,0	16,5	23,0	8,5	AL
14 T5	14	6F	22,29	26	6	8	14	14,5	20,5	9,0	16,5	23,0	9,5	AL
15 T5	15	6F	23,88	28	6	9	16	14,5	20,5	10,0	16,5	23,0	10,5	AL
16 T5	16	6F	25,47	30	6	10	16	14,5	20,5	11,0	16,5	23,0	12,0	AL
18 T5	18	6F	28,65	33	6	12	20	14,5	20,5	12,0	16,5	23,0	13,0	AL
19 T5	19	6F	30,25	34	6	14	20	14,5	20,5	14,0	16,5	23,0	15,0	AL
20 T5	20	6F	31,83	36	6	14	20	14,5	20,5	15,0	16,5	23,0	17,0	AL
24 T5	24	6F	38,21	42	6	14	25	14,5	20,5	20,0	16,5	23,0	21,0	AL
25 T5	25	6F	39,80	43	6	16	25	14,5	20,5	21,0	16,5	23,0	22,0	AL
27 T5	27	6F	42,98	47	8	16	30	14,5	20,5	30,0	16,5	23,0	36,0	AL
30 T5	30	6F	47,76	51	8	18	34	14,5	20,5	40,0	16,5	23,0	54,0	AL
32 T5	32	6F	50,94	55	8	18	38	14,5	20,5	50,0	16,5	23,0	62,0	AL
36 T5	36	6F	57,31	61	8	25	40	14,5	20,5	60,0	16,5	23,0	70,0	AL
40 T5	40	6F	63,66	67	8	25	42	14,5	20,5	70,0	16,5	23,0	80,0	AL
48 T5	48	6	76,42	-	8	30	50	15,0	21,0	80,0	17,0	24,0	100,0	AL
60 T5	60	6	95,52	-	10	35	55	15,0	21,0	100,0	17,0	24,0	125,0	AL
72 T5	72	6	114,59	-	10	40	55	15,0	21,0	140,0	17,0	24,0	180,0	AL



LEGENDA
6F = com flange maciça
6 = sem flange maciça
L1 = largura sem cubo
L2 = largura total com cubo

Ex.: 20 T5 10
↓ número de dentes
↓ passo
para correia com 6 mm largura

Polias Sincronizadoras

T5

Passo 5 mm (Padronizada)


Dentes Trapezoidais

Para correias de largura 16 mm
Para correias de largura 20 mm

Código	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Min.	Ø P Furo Máx.	Ø C Cubo	Largura 16			Largura 20			Material
								L1	L2	Peso (g)	L1	L2	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	20,5	27,0	8,0	26,0	32,0	9,0	AL
12 T5	12	6F	19,10	23	4	6	12	20,5	27,0	9,0	26,0	32,0	10,0	AL
14 T5	14	6F	22,29	26	6	8	14	20,5	27,0	10,0	26,0	32,0	11,0	AL
15 T5	15	6F	23,88	28	6	9	16	20,5	27,0	11,0	26,0	32,0	12,0	AL
16 T5	16	6F	25,47	30	6	10	16	20,5	27,0	12,0	26,0	32,0	14,0	AL
18 T5	18	6F	28,65	33	6	12	20	20,5	27,0	14,0	26,0	32,0	17,0	AL
19 T5	19	6F	30,25	34	6	14	20	20,5	27,0	17,0	26,0	32,0	18,0	AL
20 T5	20	6F	31,83	36	6	14	20	20,5	27,0	18,0	26,0	32,0	19,0	AL
24 T5	24	6F	38,21	42	6	14	25	20,5	27,0	25,0	26,0	32,0	28,0	AL
25 T5	25	6F	39,80	43	6	16	25	20,5	27,0	26,0	26,0	32,0	30,0	AL
27 T5	27	6F	42,98	47	8	16	30	20,5	27,0	40,0	26,0	32,0	43,0	AL
30 T5	30	6F	47,76	51	8	18	34	20,5	27,0	56,0	26,0	32,0	59,0	AL
32 T5	32	6F	50,94	55	8	18	38	20,5	27,0	69,0	26,0	32,0	71,0	AL
36 T5	36	6F	57,31	61	8	25	40	20,5	27,0	98,0	26,0	32,0	100,0	AL
40 T5	40	6F	63,66	67	8	25	42	20,5	27,0	100,0	26,0	32,0	122,0	AL
48 T5	48	6	76,42	-	8	30	50	21,0	28,0	120,0	26,0	32,0	130,0	AL
60 T5	60	6	95,52	-	10	35	55	21,0	28,0	140,0	26,0	32,0	180,0	AL
72 T5	72	6	114,59	-	10	40	55	21,0	28,0	200,0	26,0	32,0	265,0	AL

Para correias de largura 25 mm

Código	Número de Dentes	Tipo Polia	Diâm. Prim.	Diâm. sobre Flanges	Ø P Furo Min.	Ø P Furo Máx.	Ø C Cubo	Largura 25			Material
								L1	L2	Peso (g)	
10 T5	10	6F	15,91	20	4	6	8	31,0	38,0	10,0	AL
12 T5	12	6F	19,10	23	4	6	12	31,0	38,0	11,0	AL
14 T5	14	6F	22,29	26	6	8	14	31,0	38,0	12,0	AL
15 T5	15	6F	23,88	28	6	9	16	31,0	38,0	14,0	AL
16 T5	16	6F	25,47	30	6	10	16	31,0	38,0	16,0	AL
18 T5	18	6F	28,65	33	6	12	20	31,0	38,0	18,0	AL
19 T5	19	6F	30,25	34	6	14	20	31,0	38,0	19,0	AL
20 T5	20	6F	31,83	36	6	14	20	31,0	38,0	22,0	AL
24 T5	24	6F	38,21	42	6	14	25	31,0	38,0	35,0	AL
25 T5	25	6F	39,80	43	6	16	25	31,0	38,0	40,0	AL
27 T5	27	6F	42,98	47	8	16	30	31,0	38,0	54,0	AL
30 T5	30	6F	47,76	51	8	18	34	31,0	38,0	63,0	AL
32 T5	32	6F	50,94	55	8	18	38	31,0	38,0	78,0	AL
36 T5	36	6F	57,31	61	8	25	40	31,0	38,0	110,0	AL
40 T5	40	6F	63,66	67	8	25	42	31,0	38,0	135,0	AL
48 T5	48	6	76,42	-	8	30	50	31,0	40,0	140,0	AL
60 T5	60	6	95,52	-	10	35	55	31,0	40,0	218,0	AL
72 T5	72	6	114,59	-	10	40	55	31,0	40,0	260,0	AL

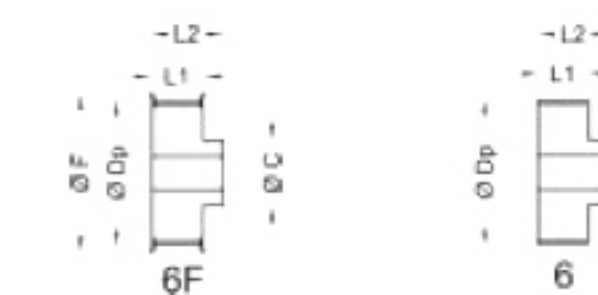

LEGENDA
6F = com flange maciça
6 = sem flange maciça
L1 = largura sem cubo
L2 = largura total com cubo

Ex.: 20 T5 20
↓ número de dentes
↓ passo
para correia com 6 mm largura